IG Lines



IG Lines

Neptun’s insulating glass lines are suitable to produce up to 400 panels/day, with dimensions up to 2600x3700mm.

The coupling press AP300 allows to manage structural coupling up to 100mm in X and in Y, which can be set from the touch screen.

Vantaggi

The line is built in an industrial way, ideal for small to medium-sized businesses that prefer reliability and low maintenance costs to high productivity and automation

SIMPLICITY
of use thanks to technical solutions and intuitive plc interface

MAXIMUM FLEXIBILITY
composition, configurable with three levels of washing machines according to the required productivity

EXCELLENT RETURN OF INVESTMENT

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

IG Lines

Auxiliary machines

Osmosis system, up to 3 stages, for the generation of demineralized water. The DEMI series is supplied complete with an accumulation tank with automatic filling management, product water quality control, alarms. Available with various production capacities from 30 to 190 lt / hr.



Loading systems of desiccant salts for aluminum profiles with vibrating function to reduce loading times. The SL-20

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

allows you to load up to 20 profiles simultaneously.



ST-100 is the revolving table that allows you to manually seal panels with dimensions from 200 × 200 mm to 1200 × 1500 mm. With pedal-controlled start-stop function.

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375


IG Lines



Device equipped with electronic measuring device for cutting profiles to size.

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

IG Lines

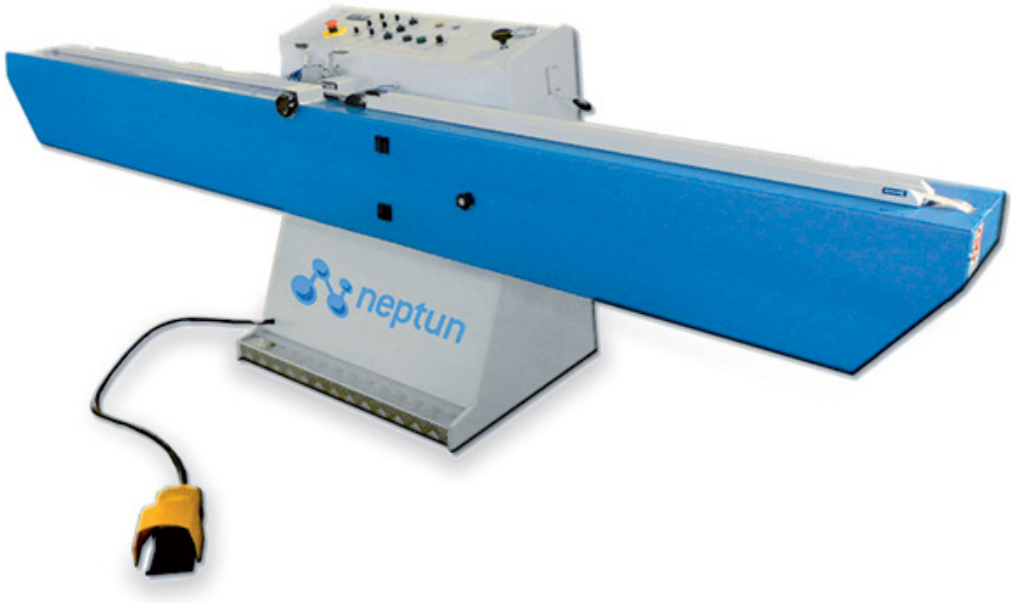

Butyl extruders for the application of the first barrier available in the 1 kg version for small production contexts and 7 kg for standard productions.
– BT-1 with 1kg load capacity and fixed speed
– BT-7 with 7kg load capacity and variable speed

Dati tecnici

Model	Dim. mm	KW	Min. glass dimension mm	Max. glass dimension mm	Glass thickness mm	Speed m/min
Tornado Easy 1300	3800 x 1300 x 2500	9.5	150 x 300	1300	3-12/3-20	1-7
Tornado Easy 1600	3800 x 1300 x 2800	11.1	150 x 300	1600	3-12/3-20	1-7

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

IG Lines

Tornado Easy 2000	7300 x 1350 x 3200	17	240 x 350	2000	3-12/3-20	1-7
Tornado Easy 2300	7300 x 1350 x 3500	20.4	240 x 350	2300	3-12/3-20	1-7
Tornado Easy 2600	7300 x 1350 x 3500	24	240 x 350	2600	3-12/3-20	1-7

Neptun srl
Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375