



LV EVO



LV Evo

LV Evo falls into the medium category of the Neptun series of vertical washing machines, placing itself between the top of the range Wave and Superinox and the cheaper LV Top.

Thanks to the powerful PLC, it can be set up with several options such as Ecosave system for reduction of energy consumption, flow meters, antistatic bar, water quality control and many more functions for special applications. The LV Evo, with its sturdy stainless steel supporting structure, is the most automated mid-level vertical washing machine on the market and can easily be defined as the best synthesis of budget, performance and automation.

Vantaggi



LONG LIFE
thanks to the stainless steel structure in both the washing and drying sections



MOTORIZATION
of the brushes above the structure



READING THE GLASS THICKNESS
and automatic opening



HIGH LEVEL OF AUTOMATION
thanks to a PLC touch screen



ENERGY SAVING AND LOW NOISE
thanks to the Ecosave system

Technical features




Supporting structure in stainless

Supporting structure in stainless steel with tempered glass doors, with independent frames for the washing and drying sections. Motorization of front and rear brushes mounted on the structure for better protection from water and humidity.




Powerful touch screen control

Powerful touch screen control unit for machine functionality management, remote diagnosis, scheduled maintenance and numerous innovative optional functions similar to the superior Wave and Superinox models.

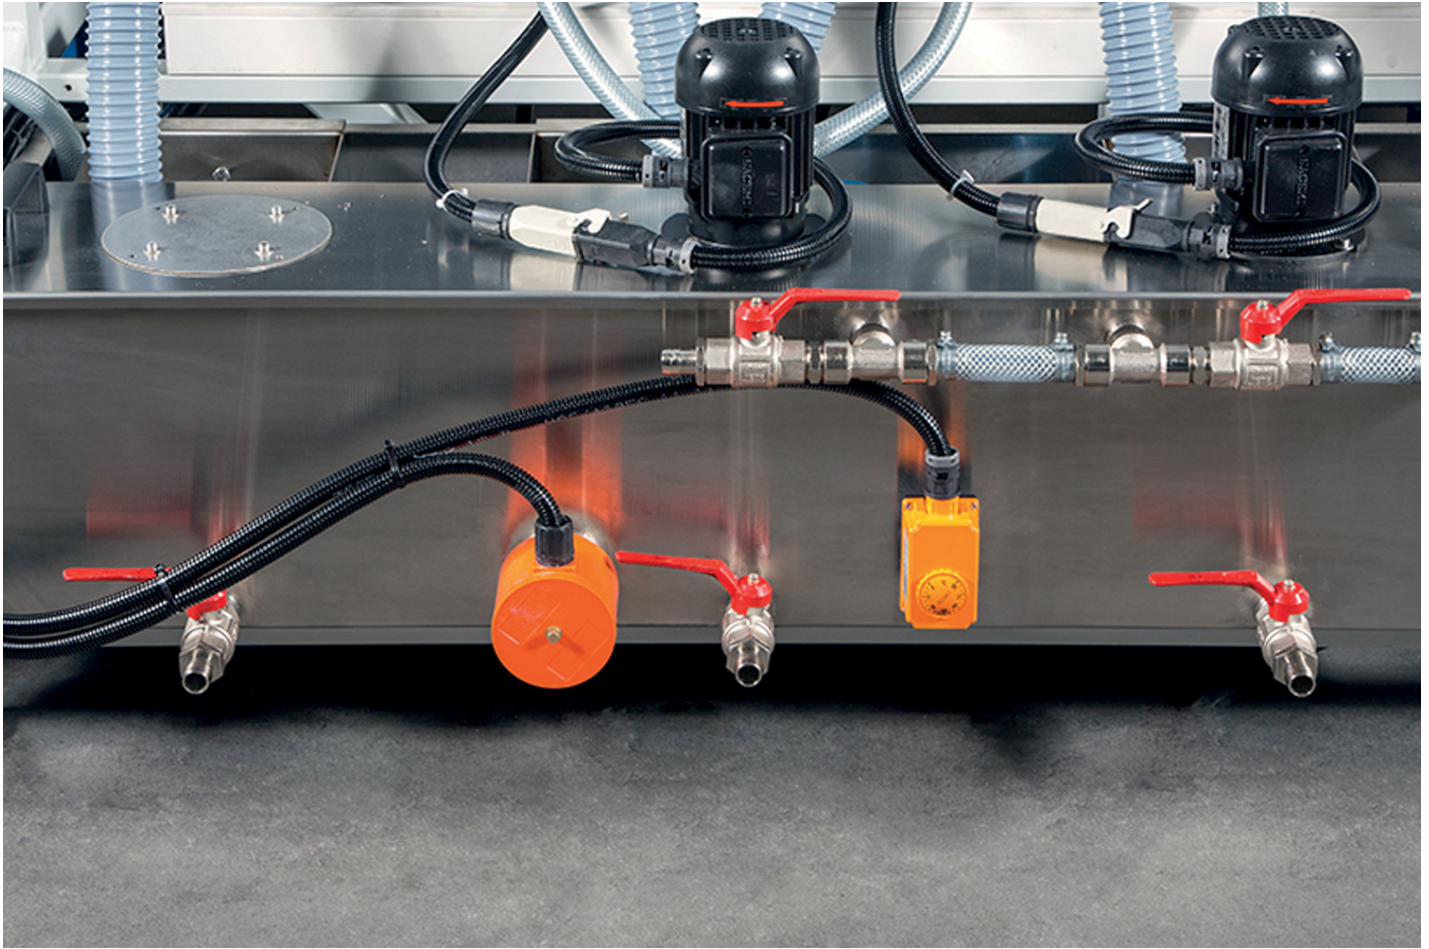


Configurable

Available with 4 or 6 brushes and prewashing. Tank in stainless steel. Separated water circuits with pumps. Resistance for water heating with safety floater.

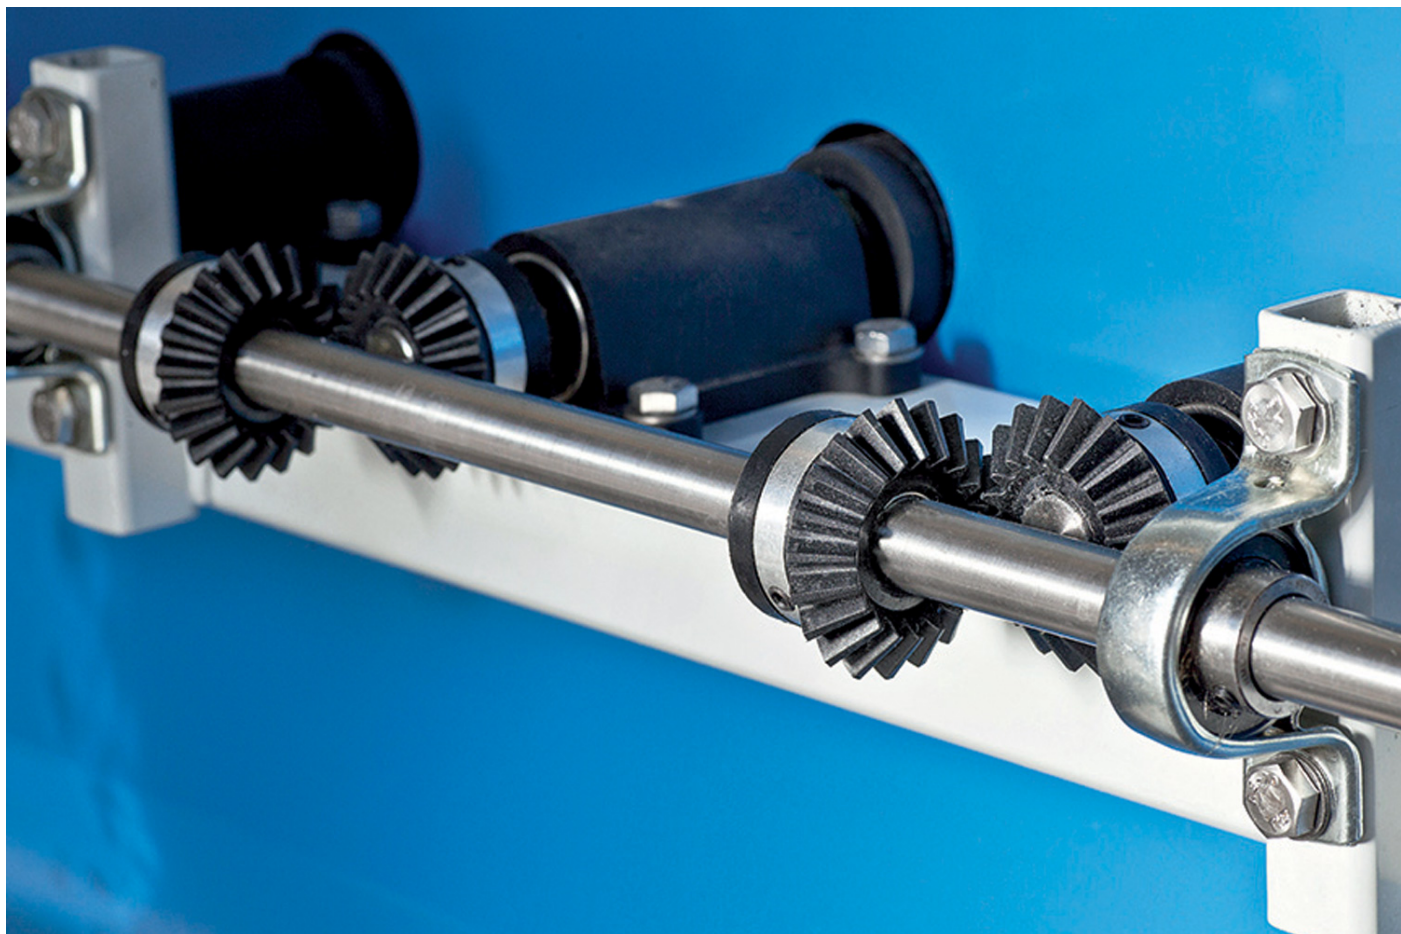

Glass conveying system

Glass conveying system with rubber scratchproof rollers, driven by maintenance free conical gears. Mechanical transmission in stainless steel. Axes of the conveying rollers and of the brushes made in stainless steel.

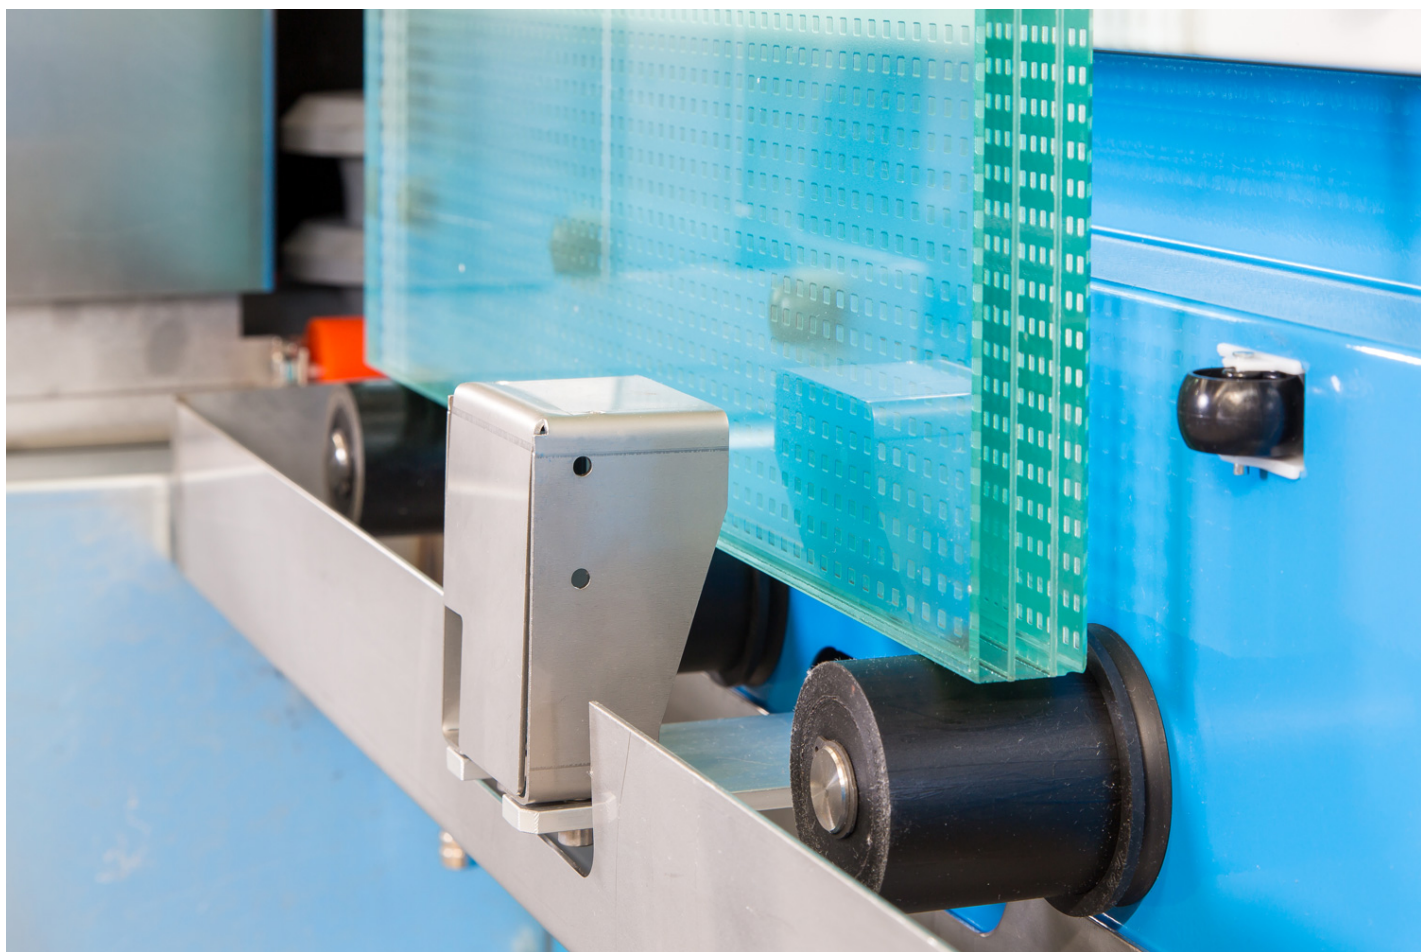


Automatism

Automatic opening of the machine by means of a glass thickness reading sensor. The glass thickness can also be acquired by the machine in upstream line (straight-line edgers or vertical work center) or downstream.




Optional

Soft or high density brushes according to the processing needs

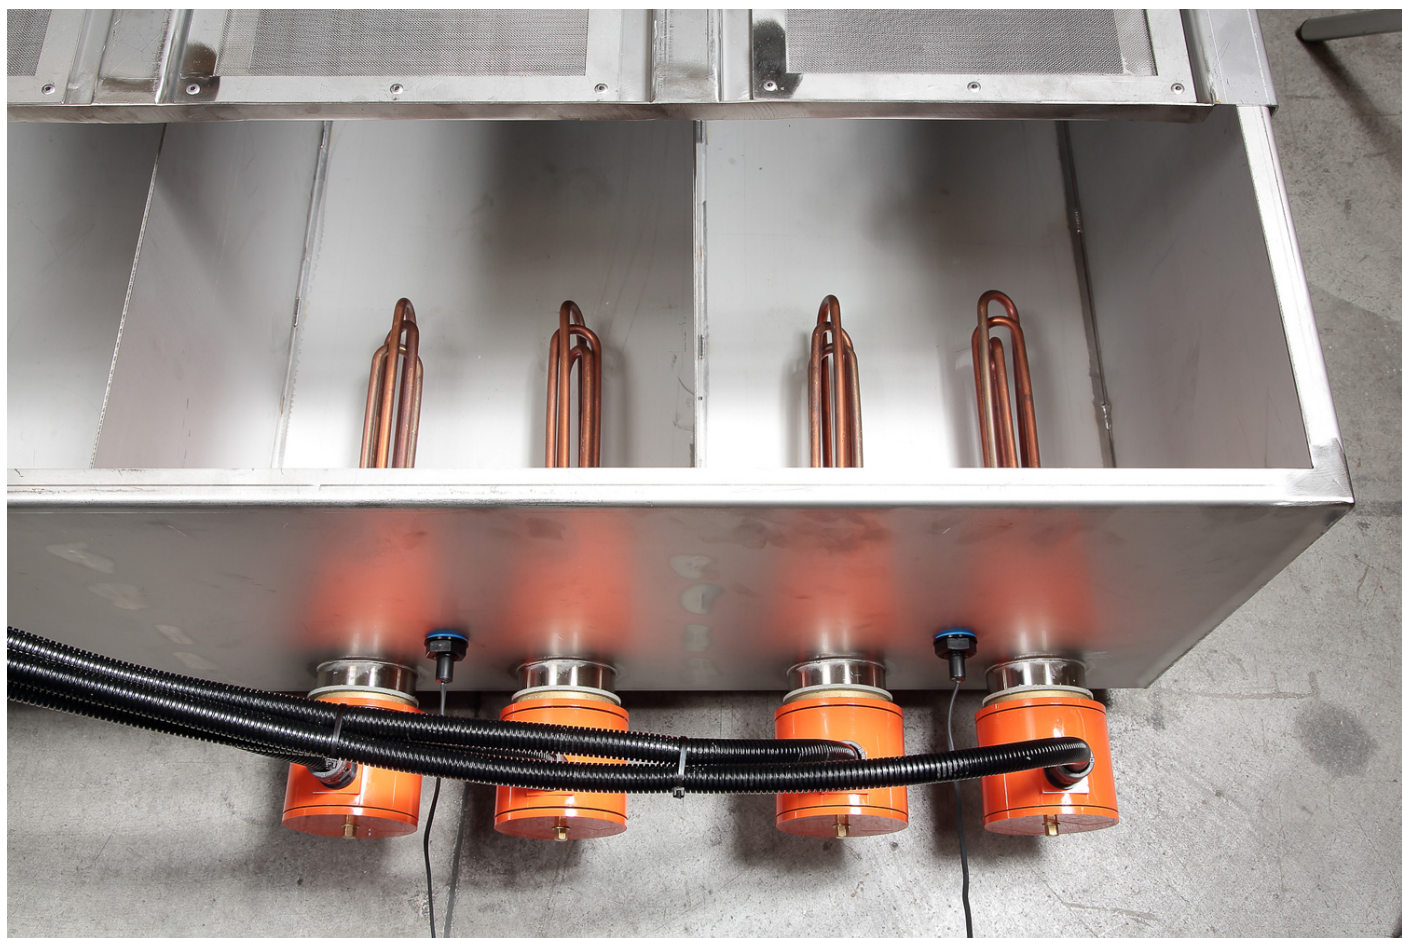

Heating device for a tank up to 60°

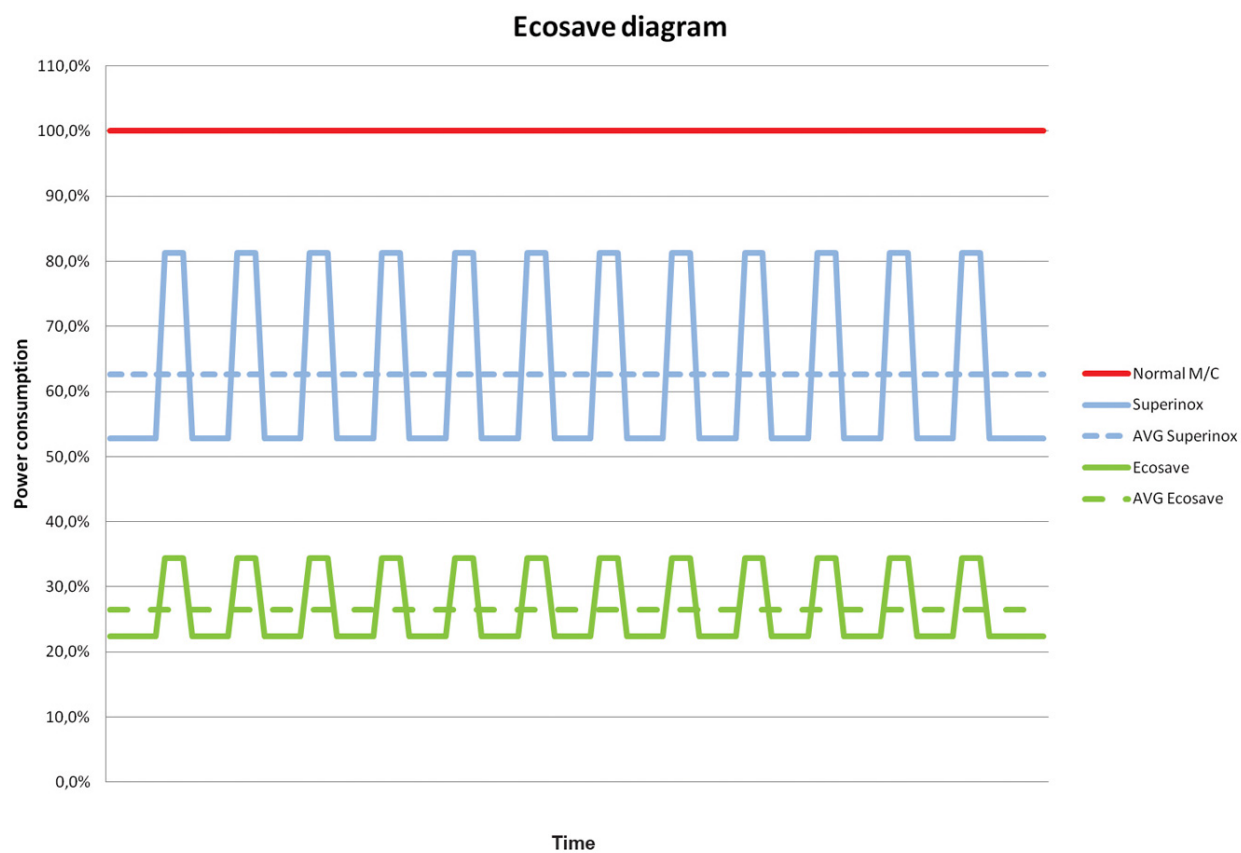

Patented system for energy saving according to the size of the glass. Allows a reduction in noise and electricity consumption by up to 60%



Connection to vertical numerical control centers



It allows Neptun full access for assistance and updates, not only to the operator panel but also to PLCs, drivers, motors and sensors.



Flow switches to check the filter cleaning status



Dati tecnici

| Model | Dim. mm | KW | Min. glass dimension mm | Max. glass dimension mm | Glass thickness mm | Speed m/min | Weight Kg |
|-----------------|--------------------|----|-------------------------|-------------------------|--------------------|-------------|-----------|
| Lv Evo 1642-30P | 7250 x 2470 x 1200 | 11 | 450 x 190 | 1600 | 3-30 | 1-5 | 1150 |
| Lv Evo 1662-30 | 7250 x 2470 x 1200 | 11 | 450 x 190 | 1600 | 3-30 | 1-5 | 1200 |
| Lv Evo 2242-30P | 7250 x 3070 x 1200 | 17 | 450 x 190 | 2200 | 3-30 | 1-5 | 1300 |
| Lv Evo 2262-30 | 7250 x 3070 x 1200 | 17 | 450 x 190 | 2200 | 3-30 | 1-5 | 1350 |
| Lv EVo 2642-30P | 7250 x 3470 x 1200 | 17 | 450 x 190 | 2600 | 3-30 | 1-5 | 2100 |
| Lv Evo 2662-30 | 7250 x 3470 x 1200 | 17 | 450 x 190 | 2600 | 3-30 | 1-5 | 2200 |

LV Evo



Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375