

Quickline



Quickline

according to the type of production required:

- QuickDrill with QuickMill to perform milling, drilling and countersinking on the entire work area, without any black area;
- QuickEdge with Quick2 to have a complete cycle of seaming, polished grinding, milling and drilling.

Advantages



MAXIMUM PRODUCTIVITY



**HIGH PRODUCTION
FLEXIBILITY**




INVESTMENT FLEXIBILITY



LOW MAINTENANCE COST
being specialized and not
complex machines


Technical features

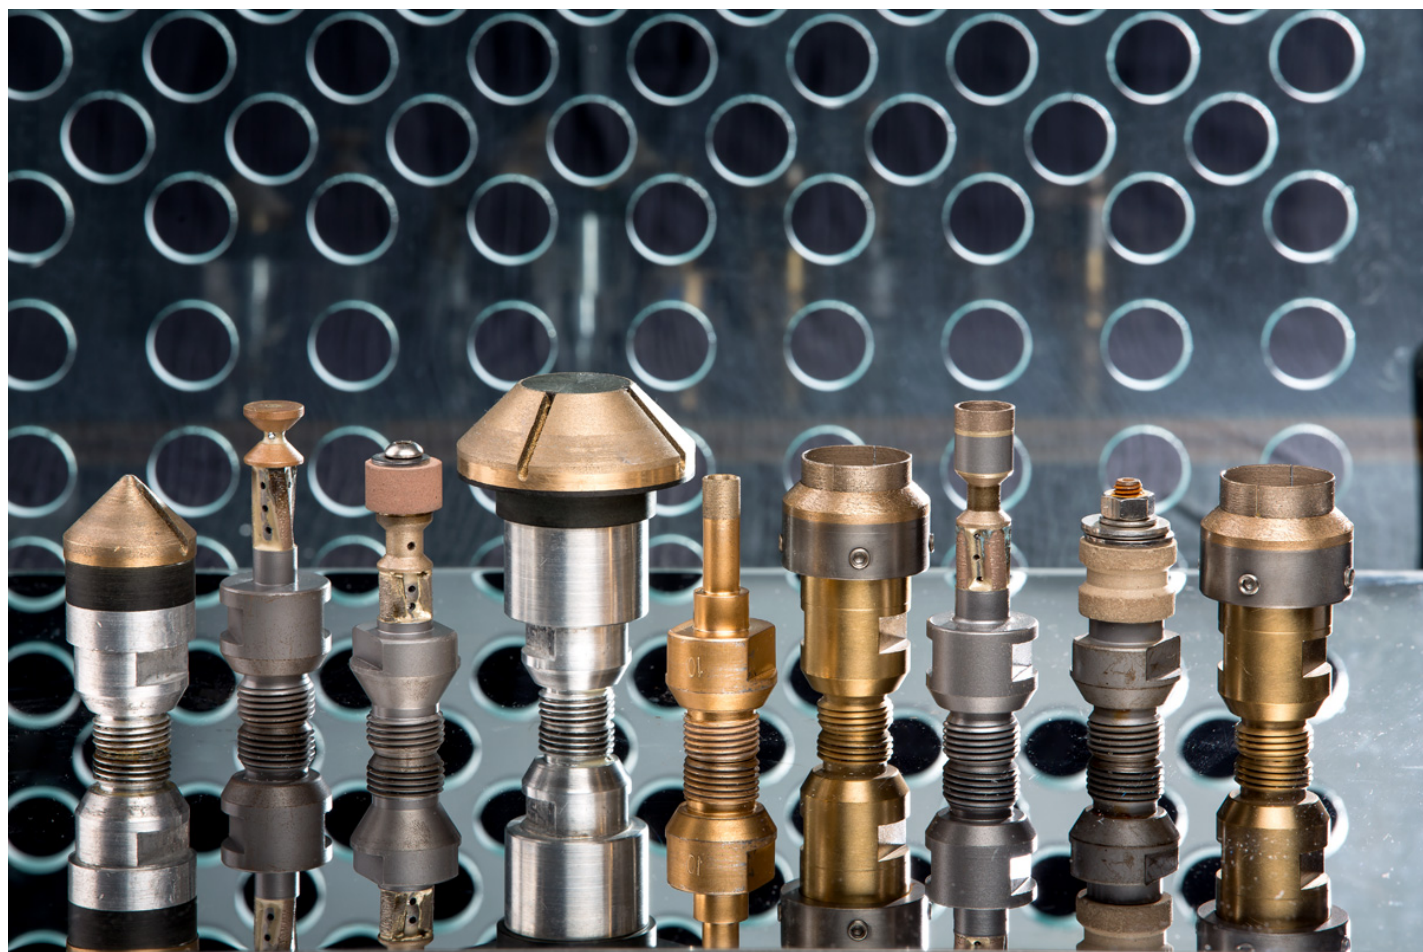

3 working modes

The Quickline has 3 working modes: in line for maximum productivity, in single mode with the processing of two different production batches at the same time for maximum flexibility, or you can work with a single machine when the other has no work or is in maintenance, for maximum return on investment.

Although there is an optimal working direction, glass loading / unloading can take place at any point on the line depending on the operator's needs of the day.

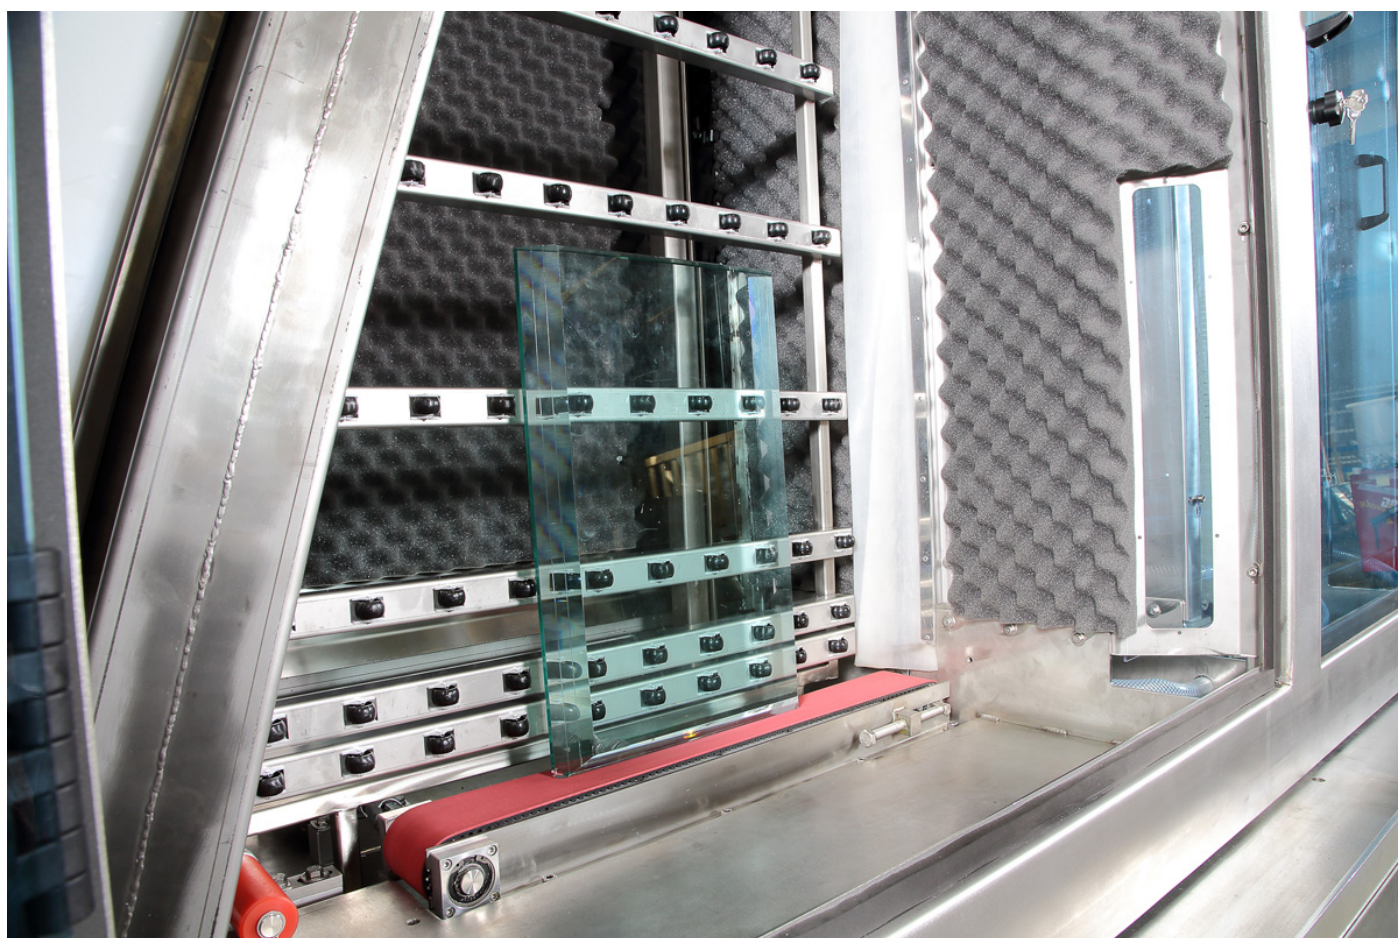

Combinations

The Quickline can be combined with our wide range of LV or Wave type vertical washing machines and completed with automatic loading and unloading system for an unmanned work island. The investment is also flexible because the line can be completed in successive stages as production needs grow.



Optional


Data entry with bar code, available in both wireless and wired versions.




It allows Neptun full access for assistance and updates, not only to the operator panel but also to PLCs, drivers, motors and sensors.




Tool trolley with 20 tanged cones included.

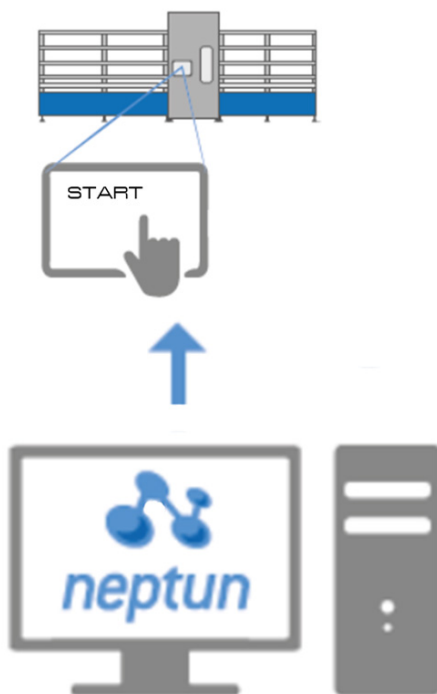

Additional license for remote programming.

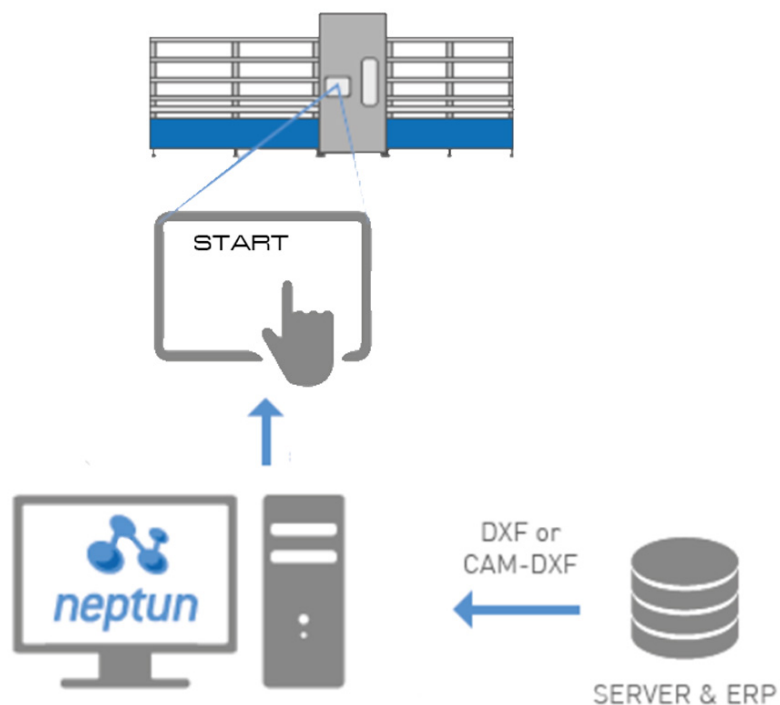

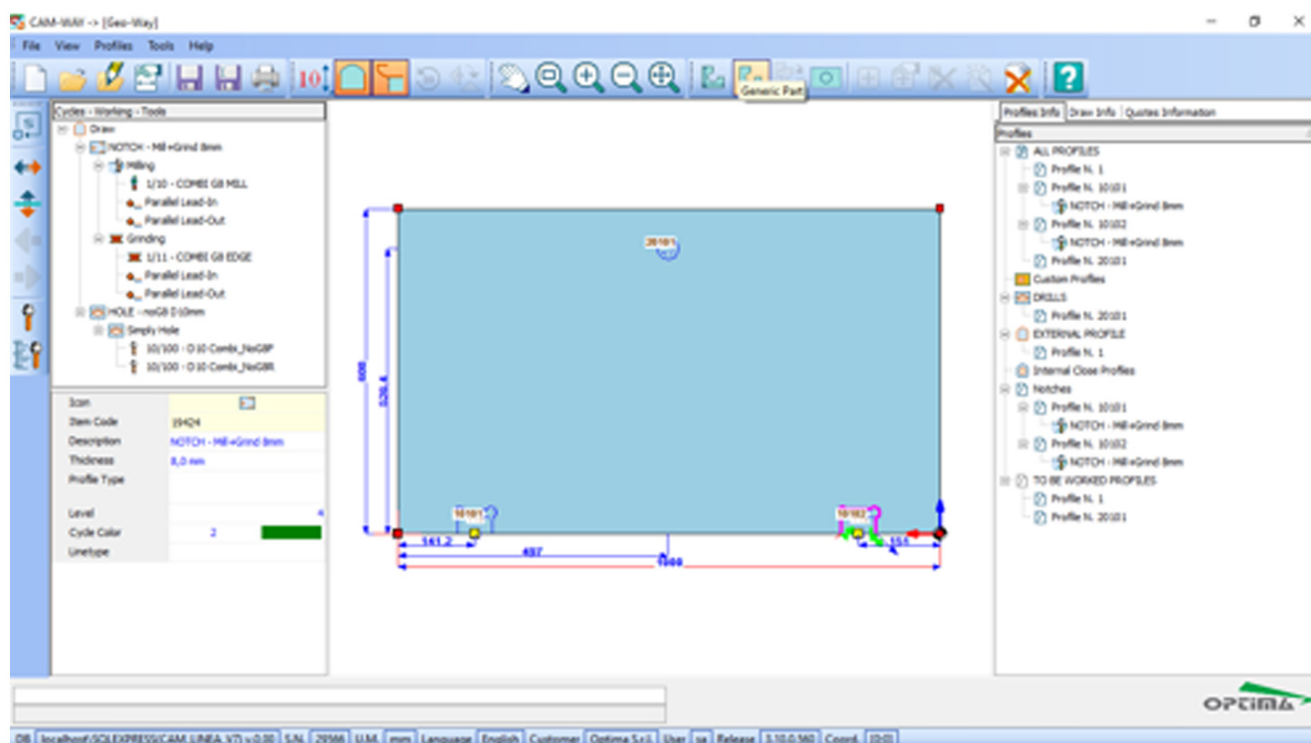

Dati tecnici

Model	Dim. mm	KW	Min. glass dimension mm	Max. glass dimension mm	Glass thickness mm	Speed m/min	Weight Kg	Diameter mm
Quickline 160-24	12700 x 2800 x 2100	9	420/800 - 340	1600 x 2400	3/5 - 30	1-25	4-80	±0,15
Quickline 160-30	14500 x 2800 x 2100	9	420/800-340	1600 x 3000	3/5-30	1-25	4-80	±0,15
Quickline T8 160-30	14810 x 2992 x 2200	13	420/800-340	1600 x 3000	3/5-30	1-25	4-80	±0,15
Quickline 160-24 + LV	18150 x 2800 x 2100	15,5	420/800 - 340	1600 x 2400	3/5 - 30	1-25	4-80	±0,15

Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

Quickline 160-30 + LV	21150 x 2800 x 2100	15,5 420/800-340	1600 x 3000	3/5-30	1-25	4-80	±0,15
Quickline T8 160-30 + LV	21460 x 2992 x 2200	19,5 420/800-340	1600 x 3000	3/5-30	1-25	4-80	±0,15