



Tornado HP-S

Tornado HP-S represent the category of horizontal washers with the same structure of Tornado HP But with optimized solutions for specific applications, such as lamination, screen printing, ceramic ink printing, solar, ultra-thin glass.

Vantaggi

Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel. +39 02 96 979 011 - Fax +39 02 96 754 375

Tornado HP-S



SPECIAL APPLICATIONS
Technical configuration
dedicated to special
applications



ERP
Optimized software for
interfacing with upstream /
downstream machines and
company ERP




DESIGNED FOR 24/7 USE
in fully automatic lines



**LOW ENERGY
CONSUMPTION AND NOISE**

Technical features

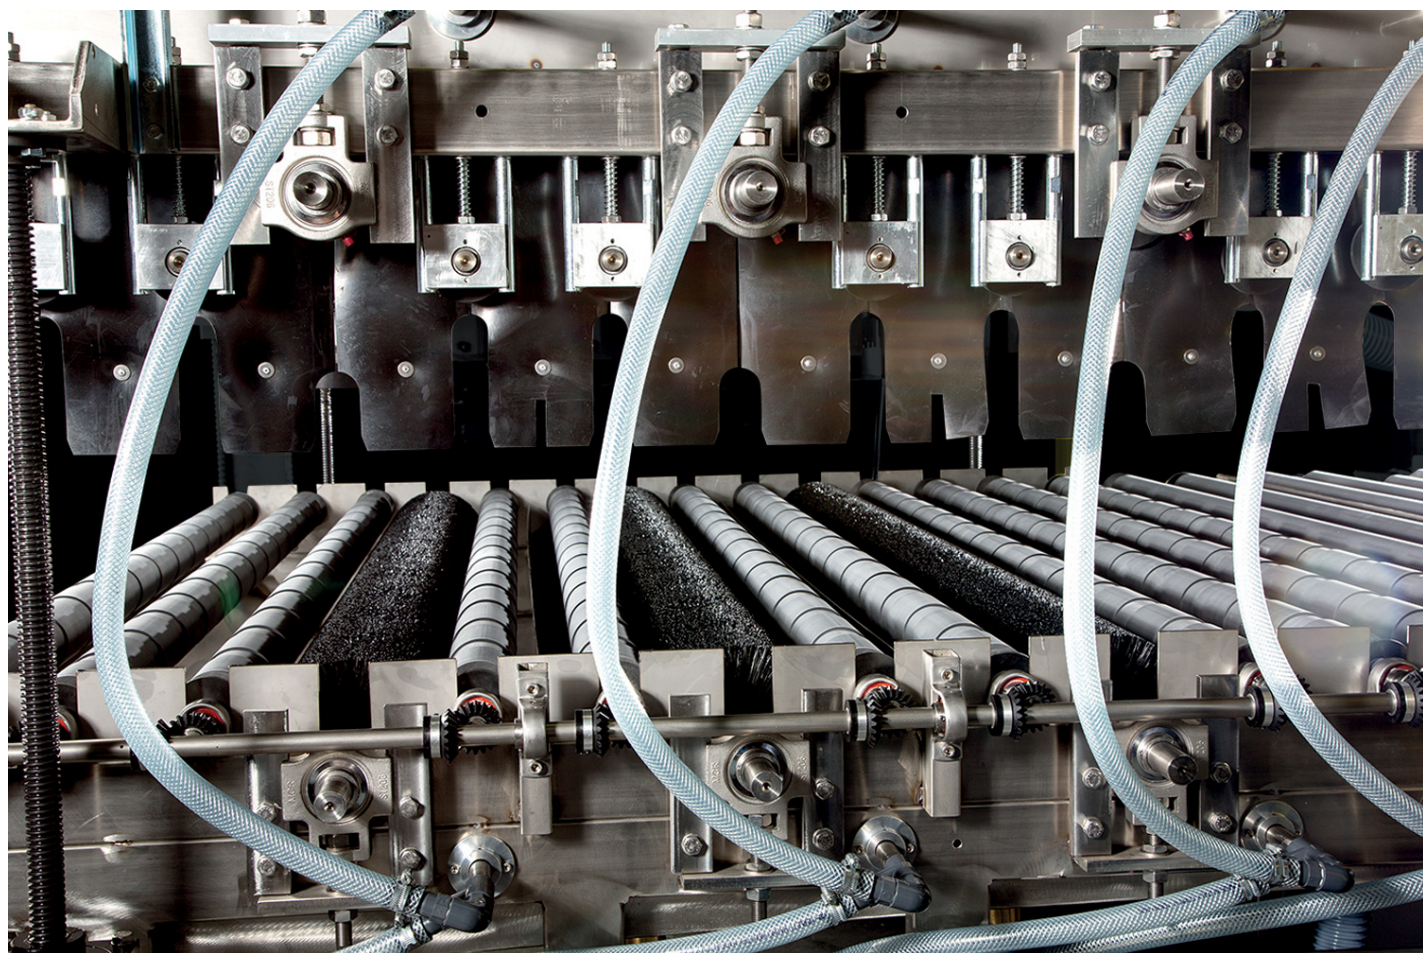

Lifting

Automatic lifting up system of the upper part up to 500 mm for easy maintenance and inspection.


Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel. +39 02 96 979 011 - Fax +39 02 96 754 375



Washing area

Washing area and drying blades in stainless steel. Air knives and water collecting slide in stainless steel.

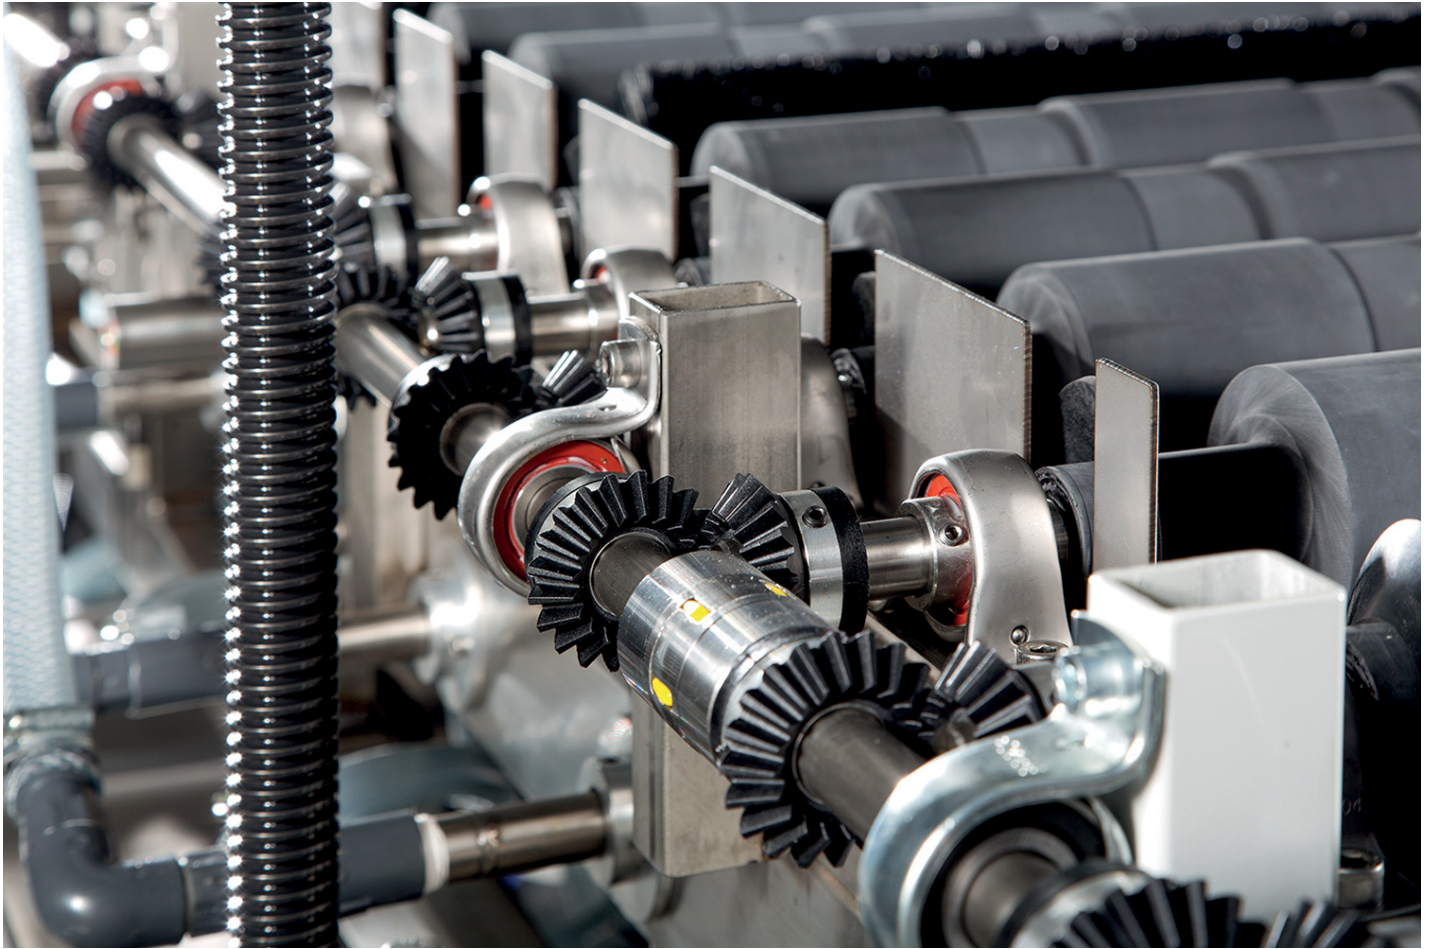

Conical gears in reinforced PA6

Transmission with conical gears in reinforced PA6, driven by a shaft in stainless steel, maintenance free. Shaft covered up to the hub.



Rollers

Rectified, vulcanized and ridged rollers with stainless steel shaft.



Powerful PLC

Tornado HP is equipped with a powerful PLC with touch screen allowing the management of numerous advanced functions, for glass sheets with thickness up to 38 mm. Thanks to the high level of automation and flexibility, there are no limits for integration into all existing production lines.



Fans

The fans under the structure ensure a constant flow of clean air for drying.

Some optionals

Patented system for energy saving according to the size of the glass. Allows a reduction in noise and electricity consumption by up to 60%


Tornado HP-S



Soft or high density brushes according to the processing needs

Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel. +39 02 96 979 011 - Fax +39 02 96 754 375

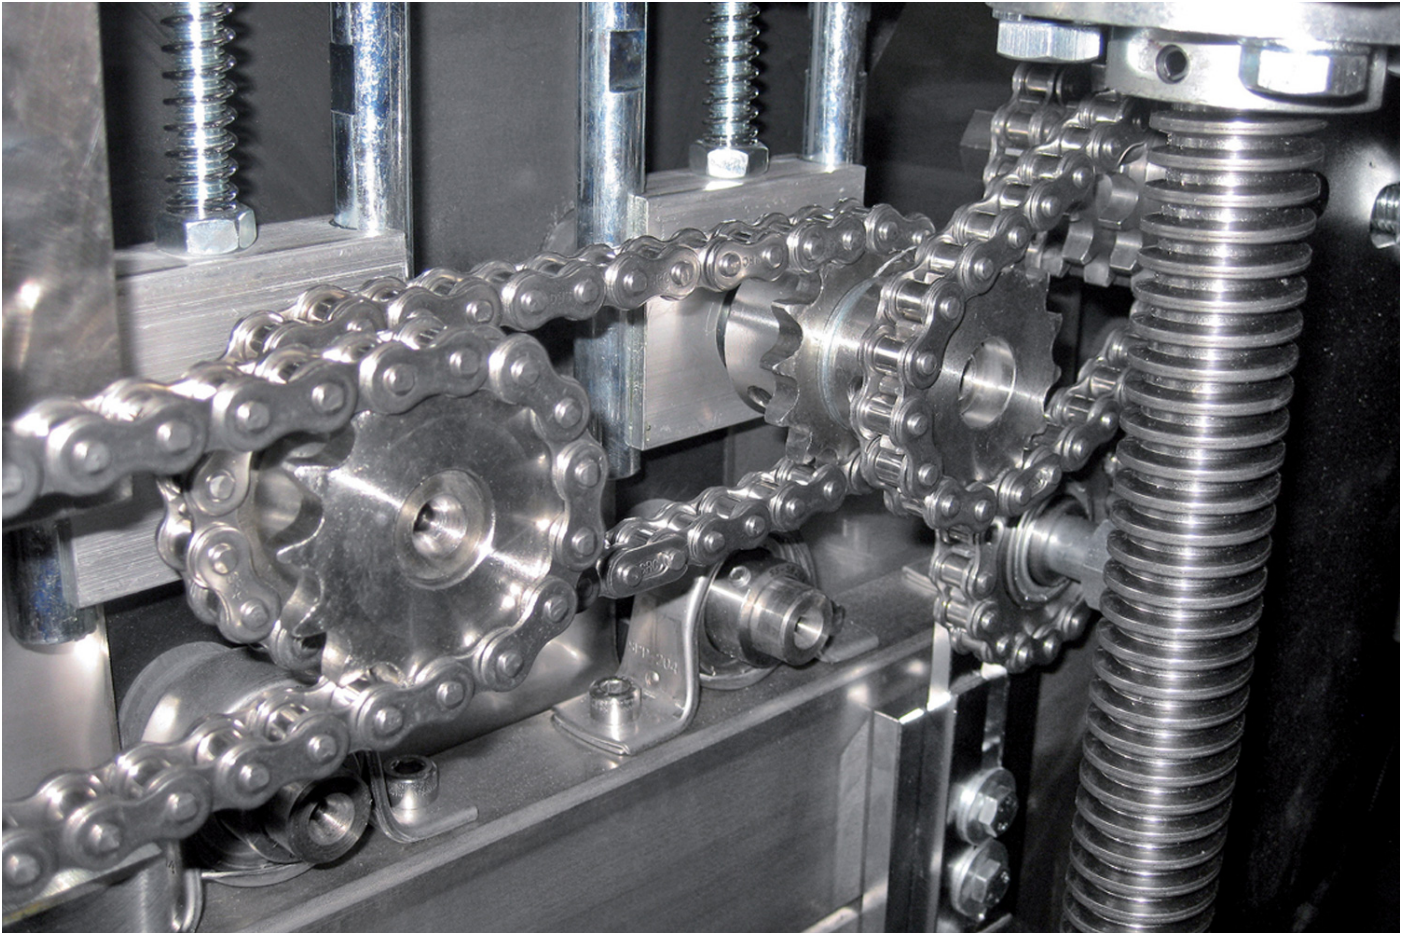

Complete transmission and protective casing of the inlet module and washing area in AISI 304 stainless steel.

Tornado HP-S



At a preset time set on the control panel, the NC activates the automatic emptying of the tanks, at the end of which they are refilled so as to have new water at the beginning of the shift. The function can be set for each day of the week


Tornado HP-S



The additional pre-wash module with brushes is complete with upper and lower brush, tank and pump, fan and upper air blade. Particularly suitable for very dirty glass that requires aggressive pre-washing.

Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel. +39 02 96 979 011 - Fax +39 02 96 754 375

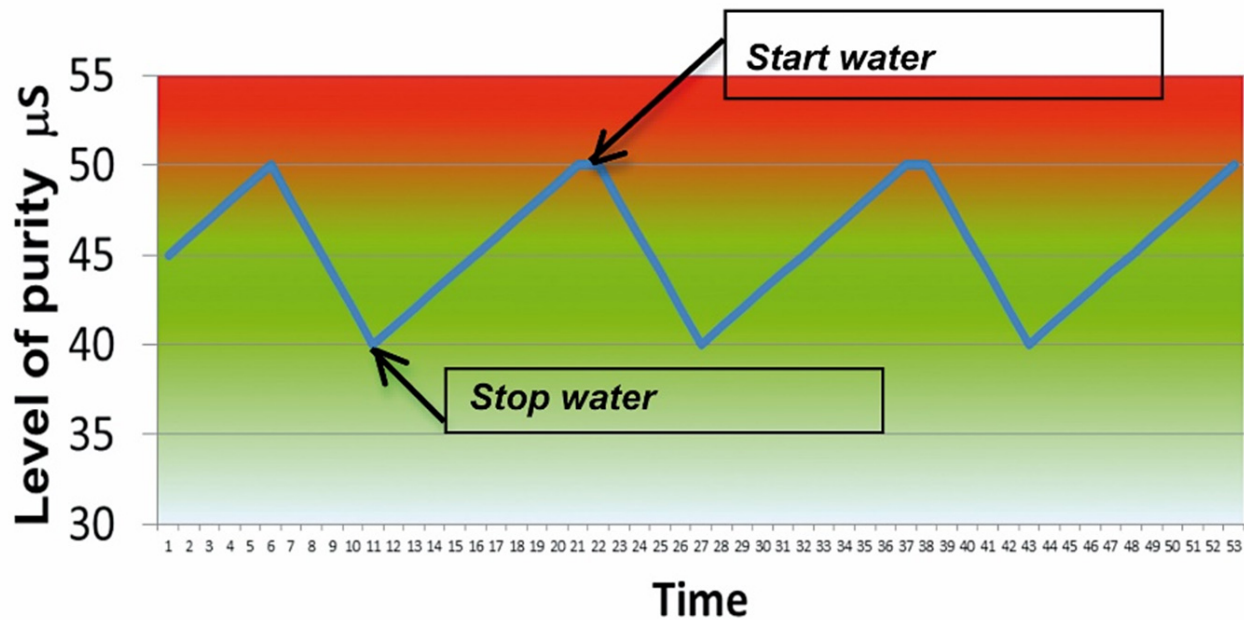

Water circuits that can be configured according to the application, with inlet and outlet filters, pumps and dedicated tank sections. Water quality control and management system, which automatically feeds clean water according to the required level of purity



Possibility of heating the water and maintaining the temperature up to 60 °, with resistances, thermostats and resistance protection sensors in the event of a drop in the water level. Extremely compact removable stainless steel tank for minimum bulk and easy maintenance.

DEMI series water demineralization plants. Reverse osmosis system, for the generation of demineralized water. Available with production capacity of 190 lt / hr and tank of 500lt.

Dati tecnici

Model	Dim. mm	KW	Min. glass dimension mm	Max. glass dimension mm	Glass thickness mm	Speed m/min
Tornado HP 1300	4275 x 3300 x 2900	9	150 x 300	1300	3-38	1-7/1-12
Tornado HP 1600	4275 x 3300 x 3200	12.5	150 x 300	1600	3-38	1-7/1-12
Tornado HP 2000	7660 x 3300 x 3600	18.9	240 x 350	2000	3-38	1-7/1-10
Tornado HP 2300	7660 x 3300 x 3900	25.9	240 x 350	2300	3-38	1-7/1-10
Tornado HP 2600	7660 x 3300 x 4200	25.9	240 x 350	2600	3-38	1-7/1-10

Neptun srl

Via Mazzini, 63 E/F - 22070 Rovello Porro (Co) Italia
Tel.+39 02 96 979 011 - Fax +39 02 96 754 375

Tornado HP-S



Tornado HP 3000 7830 x 3300 x 4650 25.9 240 x 350	3000	3-38	1-7/1-10
Tornado HP 3300 7830 x 3300 x 4950 33.9 240 x 350	3300	3-38	1-7/1-10